

**Vibration to electrical energy converter esp. to supply sensors and radio transmitters in waggons and containers**

**Patent number:** DE19520521  
**Publication date:** 1995-12-14  
**Inventor:** TIEMANN JEROME JOHNSON (US)  
**Applicant:** GEN ELECTRIC (US)

**Classification:**




**- international:** B61D43/00; G08G1/127; H02J7/14; H02K35/00B61D43/00; G08G1/127; H02J7/14; H02K35/00(IPC1-7); B61D43/00; H02K35/00; G05D1/02; G08G1/0968

**- european:** B61D43/00; G08G1/127; H02J7/14; H02K35/00

**Application number:** DE19951020521 19950603

**Priority number(s):** US19940258869 19940613


**Also published as:**

 US5578877 (A1)  
 JP8065992 (A)  
 CA2151286 (C)

[Report a data error here](#)

**Abstract of DE19520521**

A vibration-electrical energy converter has a housing (100) with parallel side walls (103 1, 103 2) containing a magnet carrier (110) with parallel side walls (110 1, 110 2). Springs (120 1, 120 2) hold the carrier in the housing and allow movement of the carrier w.r.t. the housing along the axis of vibration. Magnets (130 1 - 130 4) are attached to the outside of the carrier walls and coils (132 1 - 132 4, 134 1 - 134 4) are attached to the inside of the housing walls. The coils produce an electrical current as a result of the variations in magnetic flux when the carrier moves w.r.t. the housing along the axis of vibration.

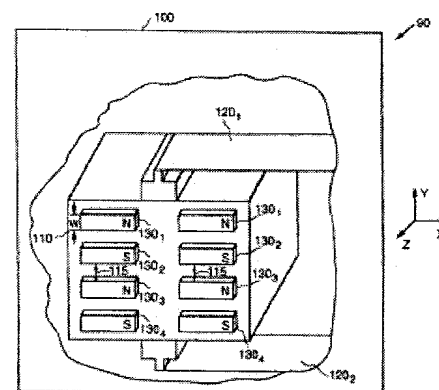

Data supplied from the *esp@cenet* database - Worldwide